536845

Rec'd PCT/PTO 3 1 MAY 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property **Organization**

International Bureau



T KERIN BUNKKEN IN BERKIR KAN BERKI BURK BURK IN KON BERKI BURK BURK BURK BURK BUK BERKED BURK BURK BURK BURK

(43) International Publication Date 17 June 2004 (17.06.2004)

PCT

(10) International Publication Number WO 2004/051616 A2

(51) International Patent Classification7:

G09G 3/32

(21) International Application Number:

PCT/IB2003/005432

(22) International Filing Date:

25 November 2003 (25.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 02102680.2

4 December 2002 (04.12.2002)

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JOHNSON, Mark, Thomas [GB/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). HUIB-ERTS, Johannes, Nicolaas [NL/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). WELJER, Peter [NL/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN ORGANIC LED DISPLAY DEVICE AND A METHOD FOR DRIVING SUCH A DEVICE

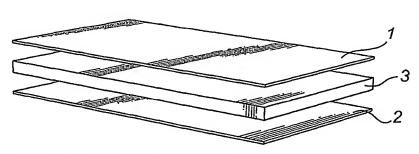

(57) Abstract: A method for driving an organic LED display device having a first and a second electrode sandwiching an organic layer defining a plurality of light emitting elements. The method comprises applying to a light emitting element a voltage within a specified voltage range, within which the risk of short circuits between the electrodes is reduced,

and controlling the duty cycle of said light emitting element, so that a desired light intensity is emitted from said light emitting element. The probability of short circuits in pixels of an organic LED display device is thus reduced by avoiding operating the display pixels within voltage ranges where the chance of short circuits is high. This limitation of the applied voltage is compensated by controlling the duty cycle of the light emitting element.